DUAL INLINE PACKAGES



| Drawing Nr. | HOLE DIA |
|---|---|
| 08CA | 0.062 [1.57] |
| 08CB | 0.047 [1.19] |
| 08CC | 0.062 [1.57] |
| 08CD | 0.047 [1.19] |

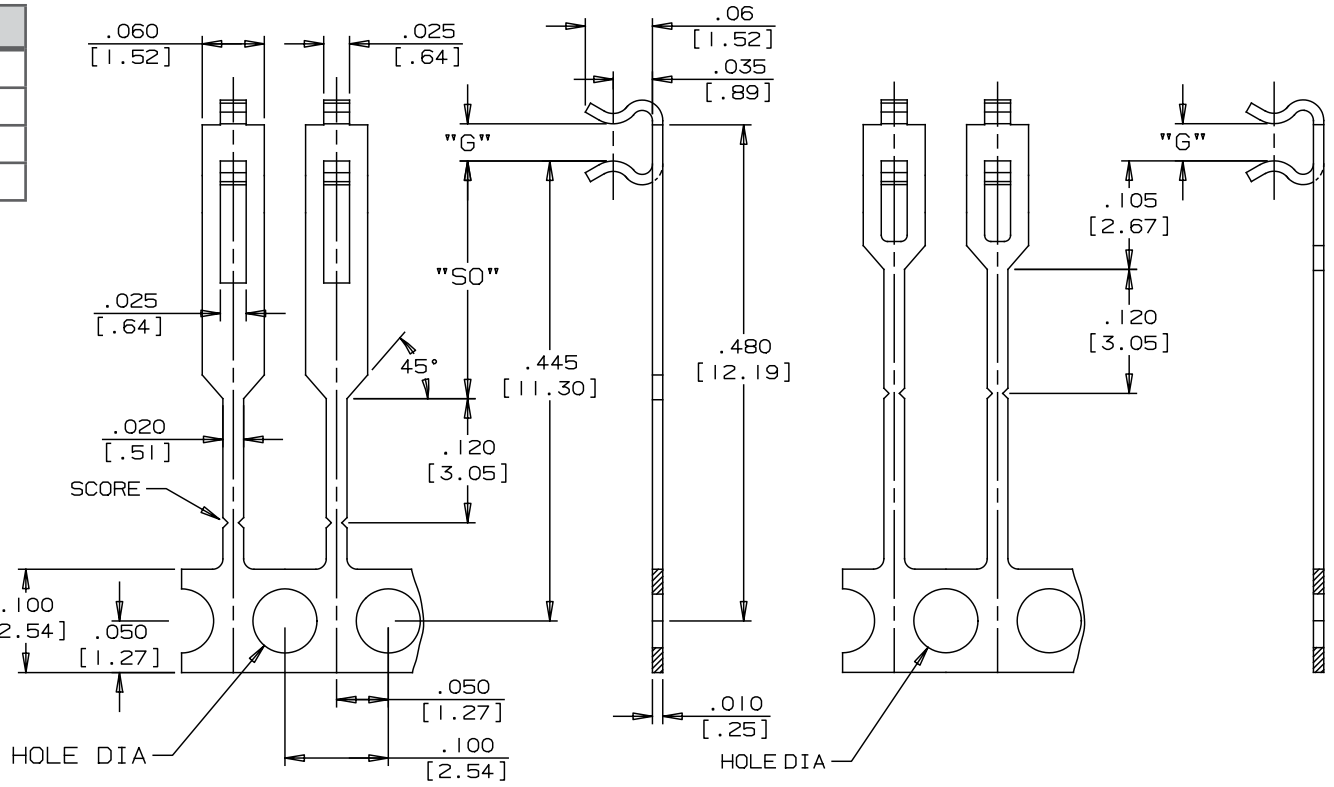


## SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

| TYPE | PITCH (P) | DRWG. NO. | SOLDER LOCATION | GAP (G) | SOLDER TYPE | SOLDER STOP | STAND OFF (SO) | MATERIAL/ PLATING | STANDARD ORIENTATION |
|---|---|---|---|---|---|---|---|---|---|
| A = DIP | A = .100[2.54] | 08CA<br>08CB<br>08CC<br>08CD | 0 = No Solder | 36 = .036[0.914] | See Chart on Page 9 | 0 = No Stop<br>S = Stop | X = See Drawing<br>U = .230[5.80] | D = Alloy CA194 Pre-Plated 60/40 Tin Lead Finish<br>Y = Alloy CA194 Pre-Plated 100% Tin Finish | D = Winding (DD) |
| CODE: | | | | | | | | | |