DUAL INLINE PACKAGES

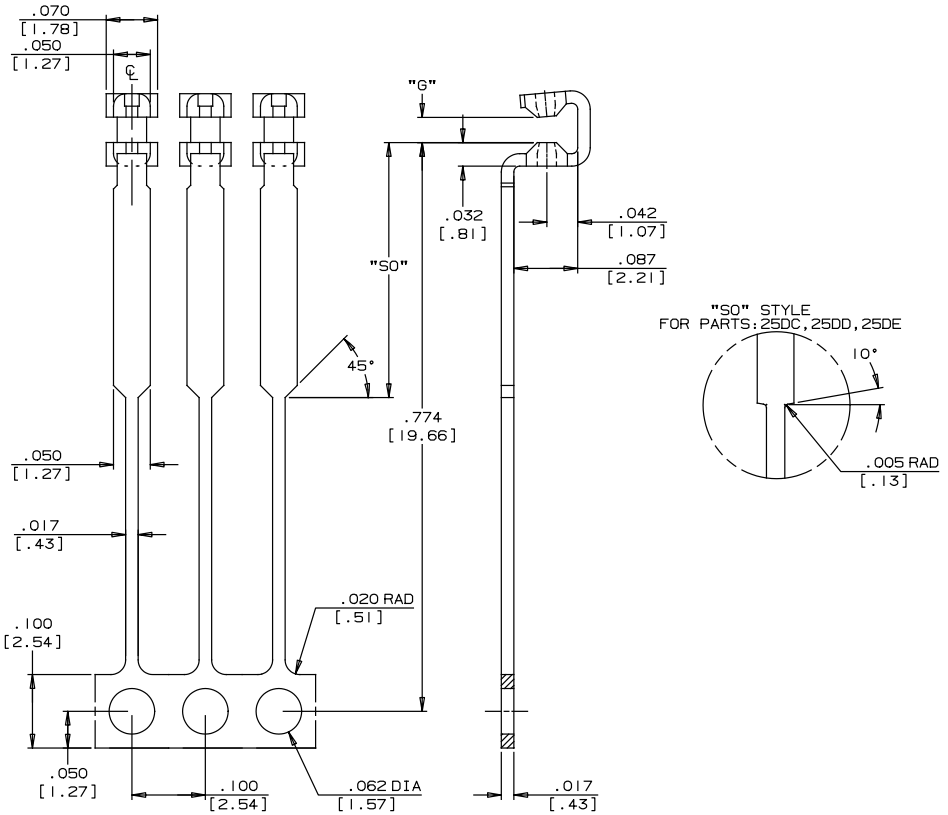

Drawing Nr.	„SO“ IN. [MM]
25DA	0.347 [8.81]
25DB	0.370 [9.40]
25DC	0.305 [7.75]
25DD	0.190 [4.83]
25DE	0.275 [6.99]

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
A = DIP	A = .100[2.54]	25DA 25DB 25DC 25DD 25DE	D = Double	31 = .031[0.787] 33 = .033[0.838] 34 = .034[0.864]	See Chart on Page 9	0 = No Stop S = Stop	(see table above)	E = Phosphor Bronze Pre-Plated 100% Sn K = Phosphor Bronze Post-Plated 100% Sn C = Phosphor Bronze Pre-Plated Sn60/Pb40 H = Phosphor Bronze Post-Plated Sn60/Pb40	D = Winding (DD)
CODE:									