SINGLE INLINE PACKAGES

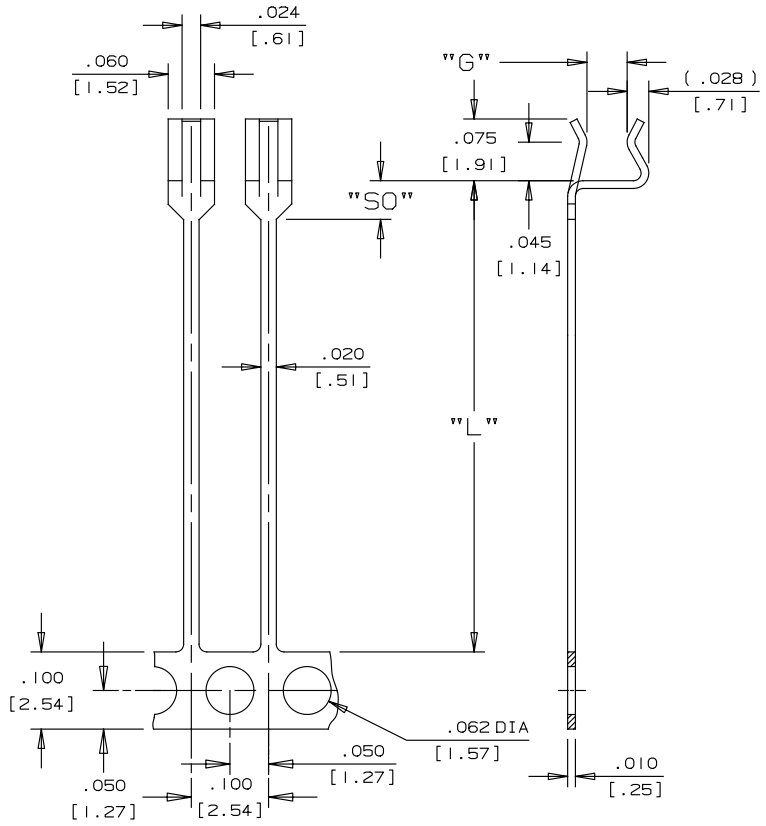

Drawing Nr.	„L" IN [MM]
14AA	0.210 [5.33]
14AB	0.610 [15.49]

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
B = SIP	A = .100[2.54]	14AA 14AB	0 = No Solder	22 = .022[0.558] 36 = .036[0.914] 56 = .056[1.42]	See Chart on Page 9	0 = No Stop S = Stop	A = .040[1.00] B = .050[1.27]	E = Phosphor Bronze Pre-Plated 100% Sn K = Phosphor Bronze Post-Plated 100% Sn C = Phosphor Bronze Pre-Plated Sn60/Pb40 H = Phosphor Bronze Post-Plated Sn60/Pb40	F = Winding (SB)
CODE:									