.050 [1.27] PITCH

SURFACE MOUNT APPLICATION

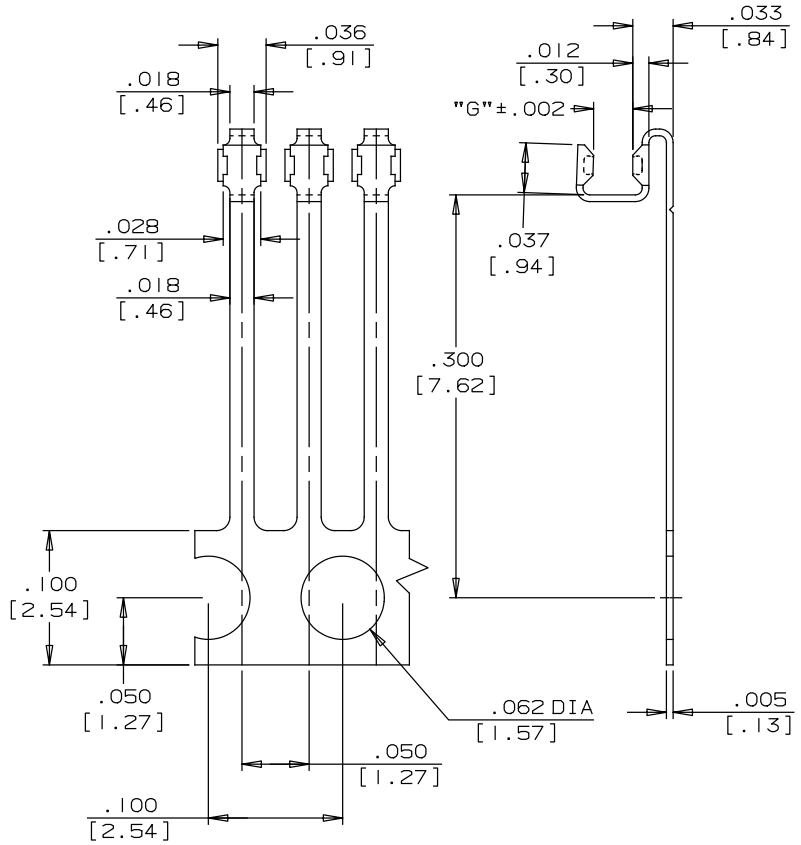

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
C = SMT	C = .050[1.27]	13CA	D = Double T = Top S = Bottom 0 = No Solder	22 = .022[0.558] 27 = .027[0.69]	See Chart on Page 9	0 = No Stop S = Stop	(see drawing)	X = Beryllium Copper Pre-Plated 100% Sn I = Beryllium Copper Post-Plated 100% Sn A = Beryllium Copper Pre-Plated Sn60/Pb40 F = Beryllium Copper Post-Plated Sn60/Pb40	D = Winding (DD)
CODE:									