.025 [0.635] PITCH

SURFACE MOUNT APPLICATION

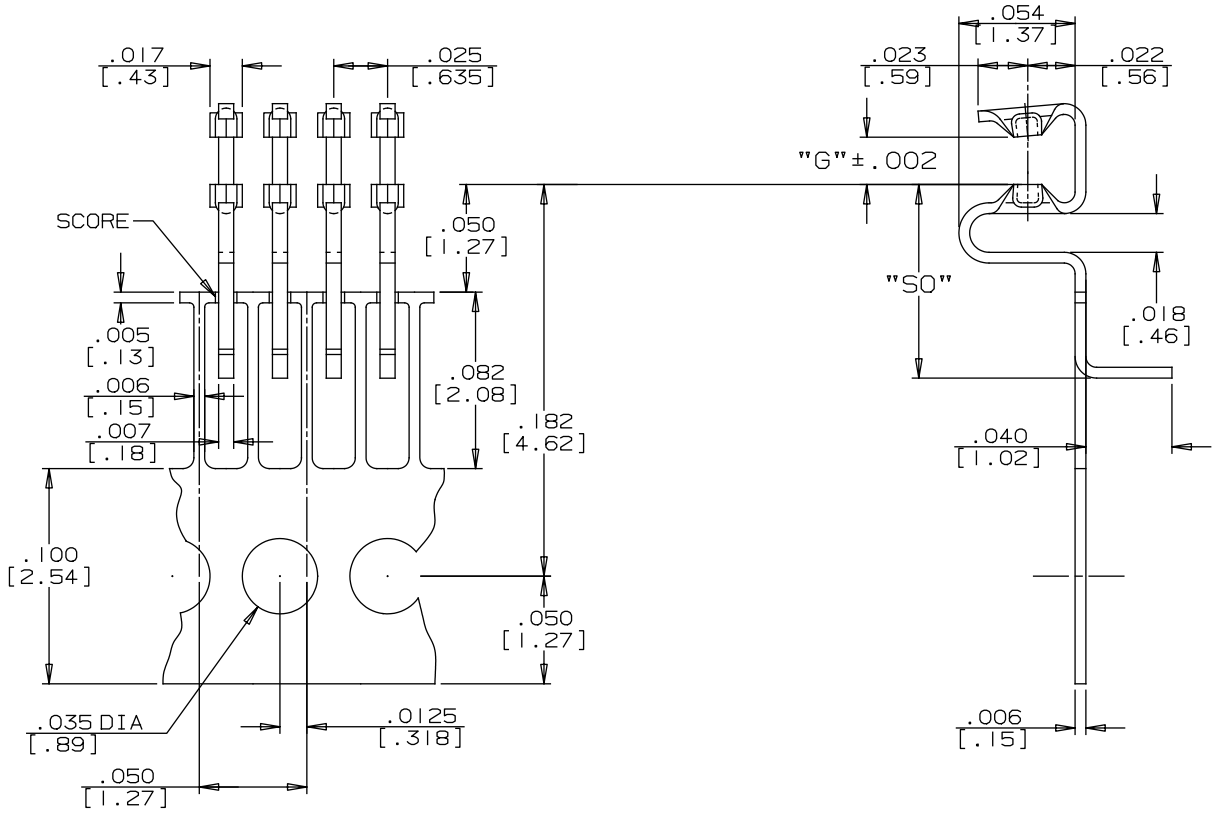

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
C = SMT	F = .025[0.635]	21DA	D = Double	22 = .022[0.558] 36 = .036[0.914] 43 = .043[1.10]	See Chart on Page 9	0 = No Stop S = Stop	D = .070[1.77] F = .090[2.28]	X = Beryllium Copper Pre-Plated 100% Sn I = Beryllium Copper Post-Plated 100% Sn A = Beryllium Copper Pre-Plated Sn60/Pb40 F = Beryllium Copper Post-Plated Sn60/Pb40	D = Winding (DD)
CODE:									