.040 [1.02] PITCH

SURFACE MOUNT APPLICATION

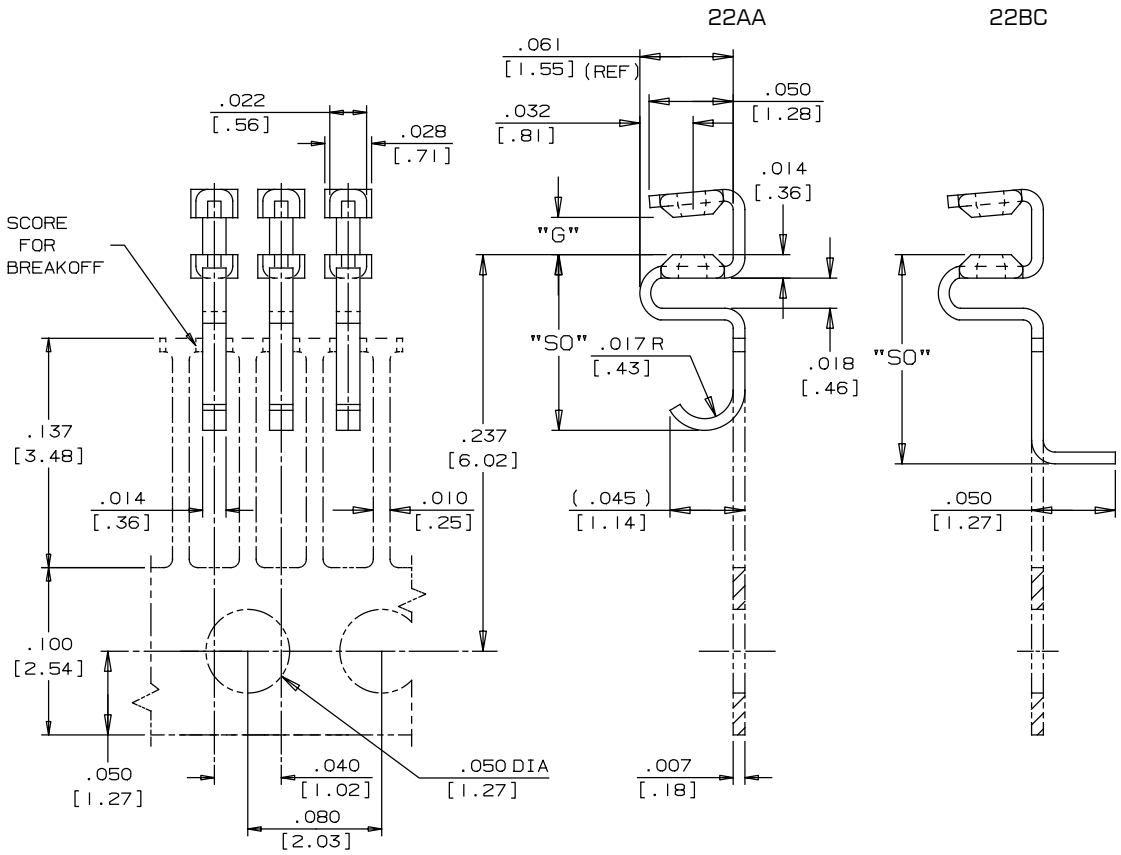

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
C = SMT	D = .040[1.02]	22AA 22BC	D = Double	22 = .022[0.56] 36 = .036[0.914] 56 = .056[1.42] 72 = .072[1.83]	See Chart on Page 9	0 = No Stop S = Stop	E = .080[2.03] H = .100[2.54] J = .125[3.17]* *22BC only	X = Beryllium Copper Pre-Plated 100% Sn I = Beryllium Copper Post-Plated 100% Sn A = Beryllium Copper Pre-Plated Sn60/Pb40 F = Beryllium Copper Post-Plated Sn60/Pb40	D = Winding (DD)
CODE:									