


.100 [2.54] PITCH

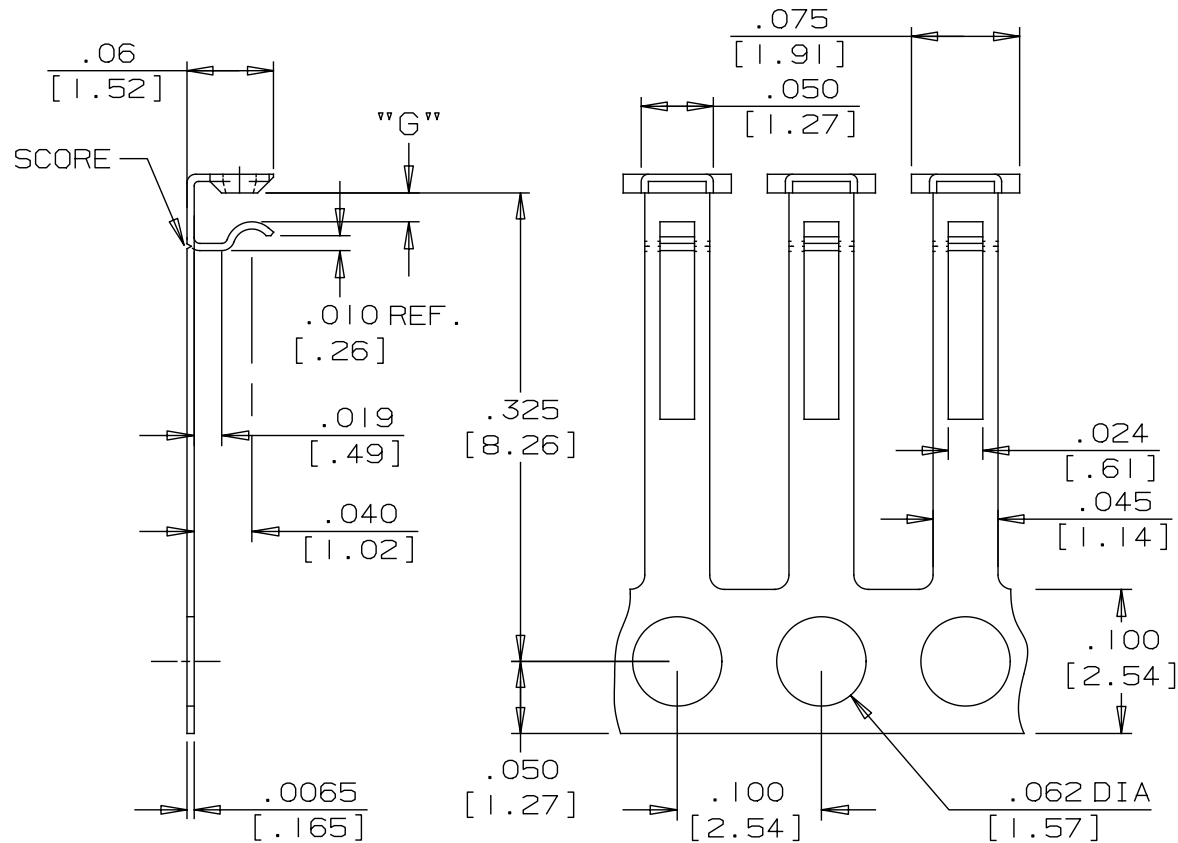

www.interplexnas.de | www.interplex.com/NAS

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
C = SMT	A = .100[2.54]	34AC	T = Top	22 = .022[0.56]	See Chart on Page 9	0 = No Stop S = Stop	X = See Drawing	S = Nickel Iron Alloy Post-plated 60/40 Tin Lead Finish over Nickel RoHS available	D = Winding (DD)

CODE:

SURFACE MOUNT APPLICATION