


.020 [0.51] / .025 [0.635] / .040 [1.02] / .050 [1.27] Pitch

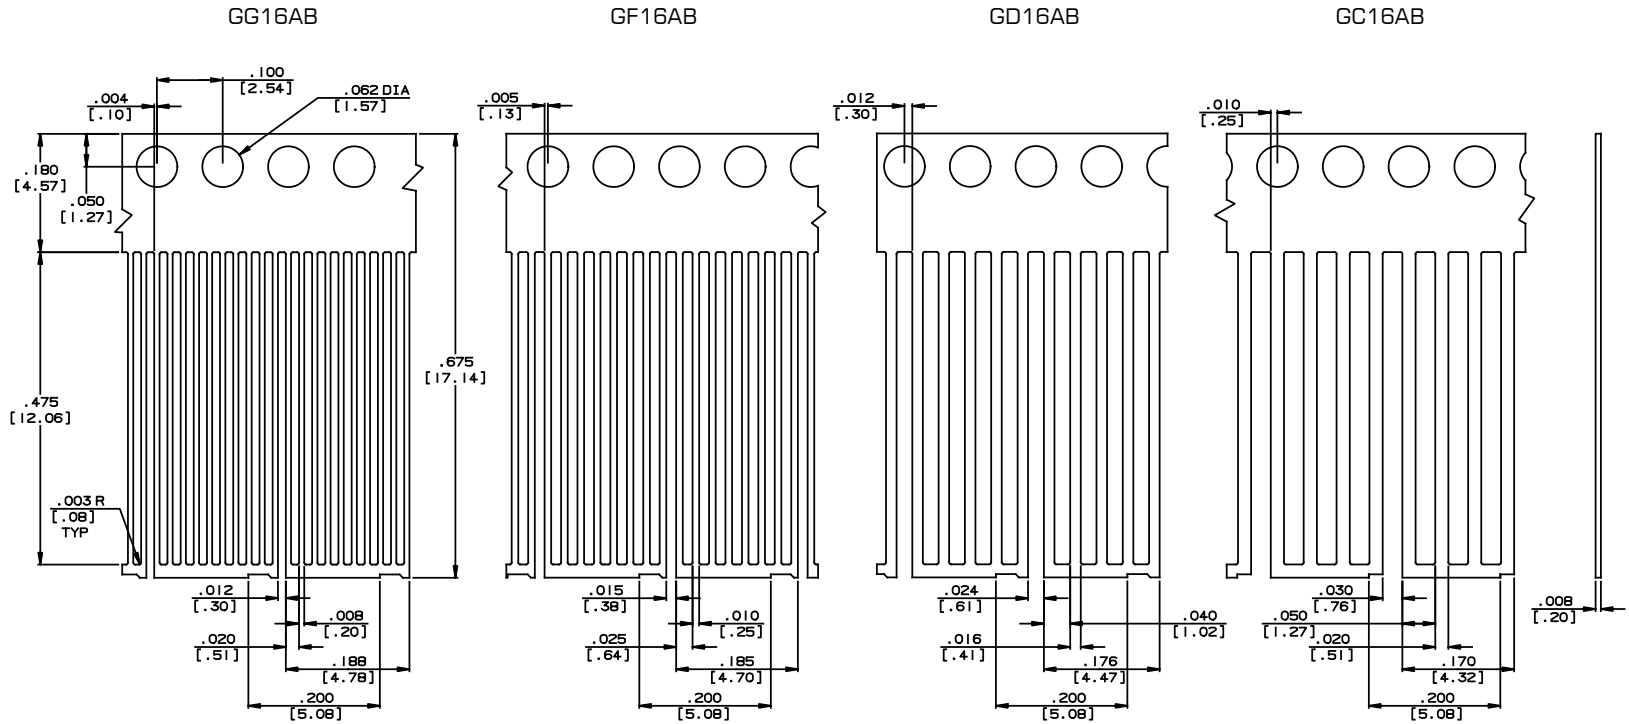

www.interplexnas.de | www.interplex.com/NAS

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
G = SPECIAL	G = .020 [0.51] F = .025 [0.635] D = .040 [1.02] C = .050 [1.27]	16AB	O = No Solder	OO = None	See Chart on Page 9	O = No Stop S = Stop	O = None	E = Phosphor Bronze Pre-Plated 100% Sn K = Phosphor Bronze Post-Plated 100% Sn C = Phosphor Bronze Pre-Plated Sn60/Pb40 H = Phosphor Bronze Post-Plated Sn60/Pb40	D = Winding (DD)

CODE:

--	--	--	--