
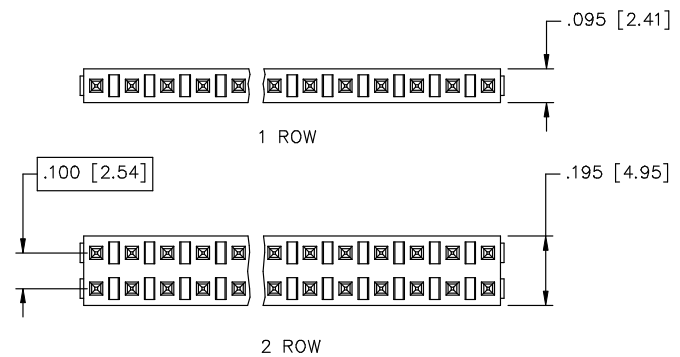


Rev	Description	Date	By
D	ADDED PIN LENGTH Y	03/07/06	JSC

PART NUMBER DESCRIPTION

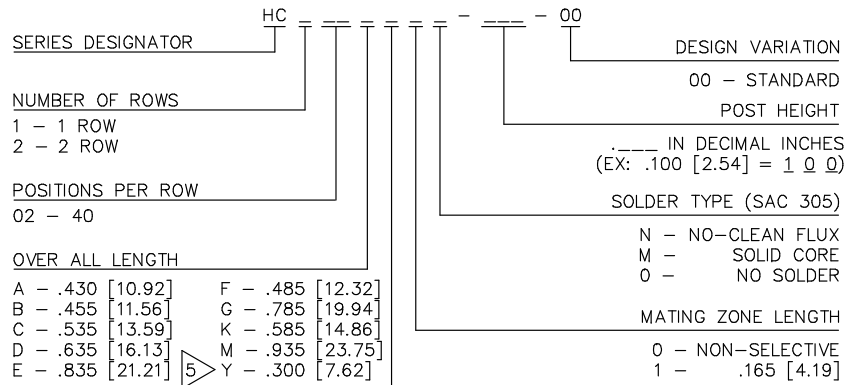

CONTACT FINISH DESIGNATION		
DESIGNATION	MATING ZONE	SOLDER TAIL
S	GOLD - FLASH	GOLD - FLASH
2	GOLD - 10 MICROINCHES	GOLD - 10 MICROINCHES
3	GOLD - 30 MICROINCHES	GOLD - 30 MICROINCHES
C	GOLD - FLASH	PURE TIN - 100 MICROINCHES
B	GOLD - 10 MICROINCHES	PURE TIN - 100 MICROINCHES
H	GOLD - 30 MICROINCHES MIN	PURE TIN - 100 MICROINCHES
0	PURE TIN - 100 MICROINCHES	PURE TIN - 100 MICROINCHES

NOTES: UNLESS OTHERWISE SPECIFIED

- INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994
- FOR OTHER SIZES, FINISHES, SOLDER VOLUMES OR ADDITIONAL DATA CONSULT TEKA CUSTOMER SERVICE DEPARTMENT
- CONNECTOR SOLDER VOLUME BASED ON APPLICATION TO A .062±.007 [1.58±.018] THICK PRINTED CIRCUIT BOARD
- ALL TIN FINISHES ARE LOW STRESS / WHISKER MITIGATING
- INDICATED LENGTHS AVAILABLE WITH NON-SELECTIVE FINISHES ONLY.


MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-V0



CONTACT: COPPER ALLOY

SOLDER: SEE PART NUMBER DESCRIPTION


CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)



1 ROW 2 ROW

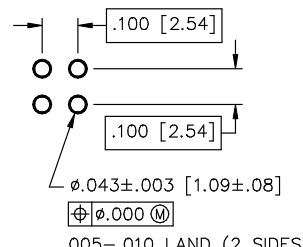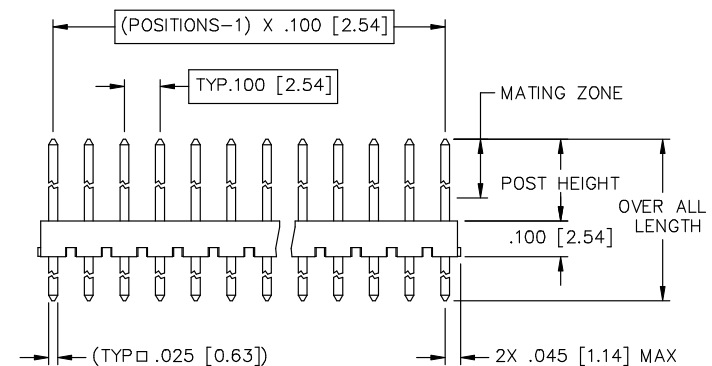

3 RECOMMENDED PRINTED CIRCUIT BOARD HOLE CONFIGURATION

Unless otherwise specified: All dimensions are: Inches [mm]	Drawn by: J CACHINA	Date: 09/15/05	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE. WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
-Tolerances-	Checked by: JSC	Date: 09/15/05	
No of places IN [mm]	Title: SOLDER BEARING HEADER-.100 2.54] PITCH (ROHS COMPLIANT)		Part No: HC ----- - --- - 00
one ±.1 ±2,54	Ref No: S20556		Scale: 3:1
two ±.02 ±0,5			Sheet 1 of 1
three ±.010 ±0,25			
Angular ±2°			