

Rev	Description	Date	By
A	INITIAL RELEASE	06/22/07	JSC

**PART NUMBER DESCRIPTION**  
 SRC 2 425 0 126 - 0


**SERIES DESIGNATOR**  
 SRC - SHROUDED R/A HDR  
 .100 SPACING

**NUMBER OF ROWS**  
 2 - 2 ROW


**POSITIONS PER ROW**  
 05, 08, 10, 13, 17, 20, 25, 30, 32

**DESIGN VARIATION**  
 0 - STANDARD

**SOLDER TAIL LENGTH**  
 .126 [3.20] (AS SHOWN)

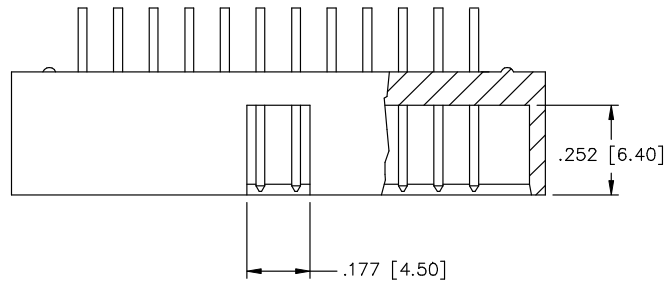

CONTACT FINISH DESIGNATION		
DESIGNATION	MATING ZONE	SOLDER TAIL
B	GOLD - 10 MICROINCHES	PURE TIN - 100 MICROINCHES
C	GOLD - FLASH	PURE TIN - 100 MICROINCHES
S	GOLD - FLASH	GOLD - FLASH
2	GOLD - 10 MICROINCHES	GOLD - 10 MICROINCHES

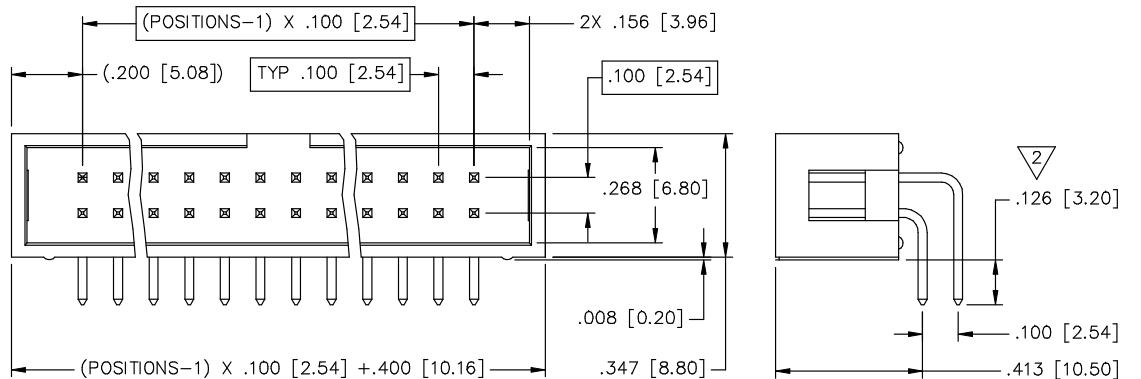

NOTES: UNLESS OTHERWISE SPECIFIED

1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994

2 FOR OTHER SIZES, FINISHES, SOLDER TAIL LENGTHS OR ADDITIONAL DATA CONSULT TEKA CUSTOMER SERVICE


3 ALL PURE TIN FINISHES ARE LOW STRESS / WHISKER MITIGATING.

MATERIALS:


HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-VO

CONTACT: COPPER ALLOY

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)



RECOMMENDED PRINTED CIRCUIT BOARD HOLE CONFIGURATION

Unless otherwise specified: All dimensions are: Inches [mm] -Tolerances- No of places IN [mm] one ±.1 ±2,54 two ±.02 ±0,5 three ±.010 ±0,25 Angular ±2'	Drawn by: J CACHINA	Date: 06/22/07	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
	Checked by: JSC	Date: 06/22/07	
Title: SHRD R/A HDR - .100 [2.54] PITCH (ROHS COMPLIANT)		Part No: SRC2___4250126-0	
Ref No: S20716		Scale: 3:1	Sheet 1 of 1