

Rev	Description	Date	By
A	INITIAL RELEASE	06/13/07	JSC

PART NUMBER DESCRIPTION

SVC 2 - - - 358 0 135 - 0

SERIES DESIGNATOR
SVC - SHROUDED VERT HDR
.100 SPACING

NUMBER OF ROWS
2 - 2 ROW

POSITIONS PER ROW
05, 08, 10, 12, 13,
17, 20, 25, 30, 32

DESIGN VARIATION
0 - STANDARD

SOLDER TAIL LENGTH
.135 [3.43] (AS SHOWN)

BODY HEIGHT
.358 [9.10] (AS SHOWN)

CONTACT FINISH DESIGNATION $\triangleleft 2 \triangleleft 3$		
DESIGNATION	MATING ZONE	SOLDER TAIL
B	GOLD - 10 MICROINCHES	PURE TIN - 100 MICROINCHES
C	GOLD - FLASH	PURE TIN - 100 MICROINCHES
S	GOLD - FLASH	GOLD - FLASH
2	GOLD - 10 MICROINCHES	GOLD - 10 MICROINCHES


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994
 - 2 FOR OTHER SIZES, FINISHES, SOLDER TAIL LENGTHS OR ADDITIONAL DATA CONSULT TEKA CUSTOMER SERVICE
 - 3 ALL PURE TIN FINISHES ARE LOW STRESS / WHISKER MITIGATING.

MATERIALS:


HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-VD


CONTACT: COPPER ALLOY

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)

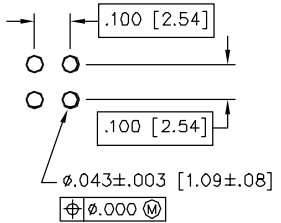

RECOMMENDED PRINTED CIRCUIT BOARD HOLE CONFIGURATION

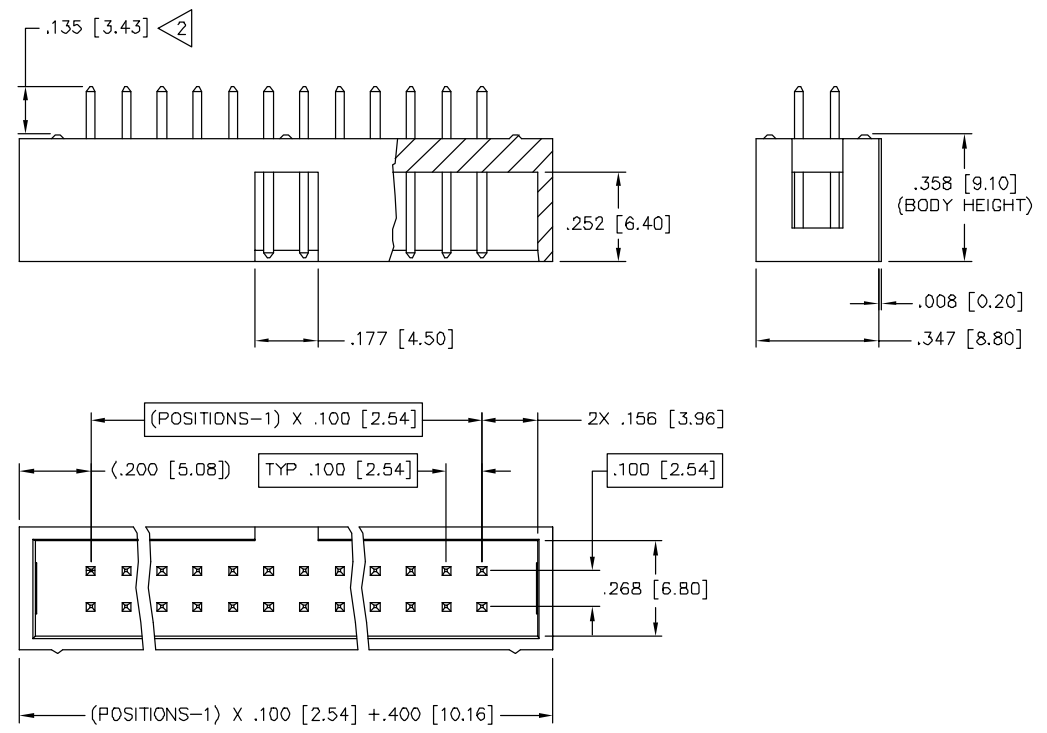

Unless otherwise specified: All dimensions are: Inches [mm] -Tolerances- No of places IN [mm] one ±.1 ±2.54 two ±.02 ±0.5 three ±.010 ±0.25 Angular ±2°	Drawn by: J CACHINA Date: 06/13/07	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02886 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com	
	Checked by: JSC Date: 06/13/07		Part No: SVC2___3580135-0
	Title: SHRD VERT HDR - .100 [2.54] PITCH (ROHS COMPLIANT)	Ref No: S20715	Scale: 3:1 Sheet 1 of 1