


Rev	Description	Date	By
A	INITIAL RELEASE	09/05/07	JSC

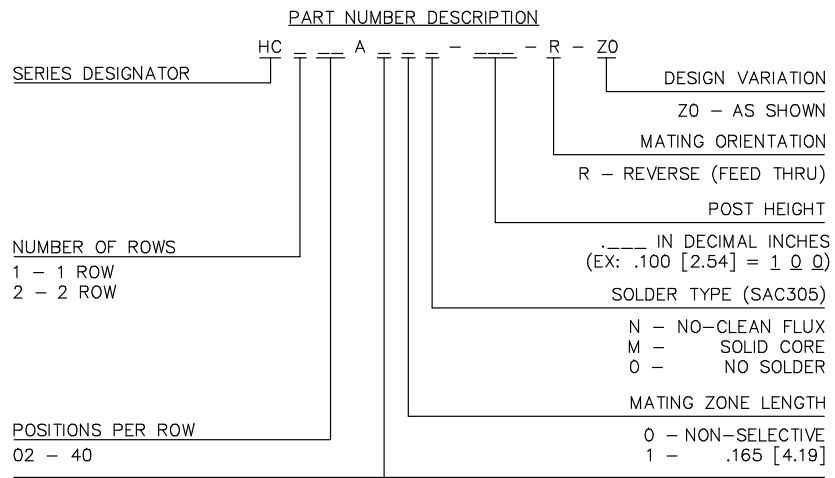

CONTACT FINISH DESIGNATION 4		
DESIGNATION	MATING ZONE	SOLDER TAIL
S	GOLD - FLASH	GOLD - FLASH
Z	GOLD - 10 MICROINCHES	GOLD - 10 MICROINCHES
C	GOLD - FLASH	PURE TIN - 100 MICROINCHES
B	GOLD - 10 MICROINCHES	PURE TIN - 100 MICROINCHES
H	GOLD - 30 MICROINCHES MIN	PURE TIN - 100 MICROINCHES
0	PURE TIN - 100 MICROINCHES	PURE TIN - 100 MICROINCHES

- NOTES: UNLESS OTHERWISE SPECIFIED
- INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994
  - FOR OTHER SIZES, FINISHES, SOLDER VOLUMES OR ADDITIONAL DATA CONSULT TEKA CUSTOMER SERVICE DEPARTMENT
  - CONNECTOR SOLDER VOLUME BASED ON APPLICATION TO A .062±.007 [1.58±0.18] THICK PRINTED CIRCUIT BOARD
  - ALL TIN FINISHES SHOWN ARE LOW STRESS / MITIGATING




MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-V0


CONTACT: COPPER ALLOY

SOLDER: SEE PART NUMBER DESCRIPTION

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)

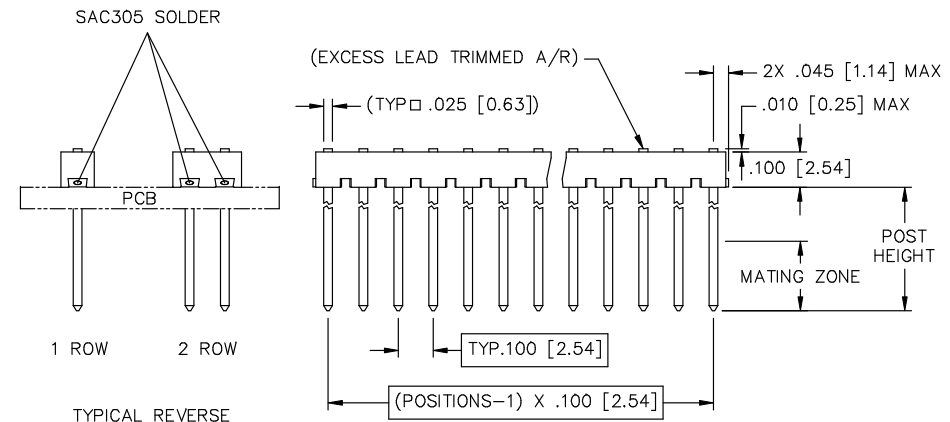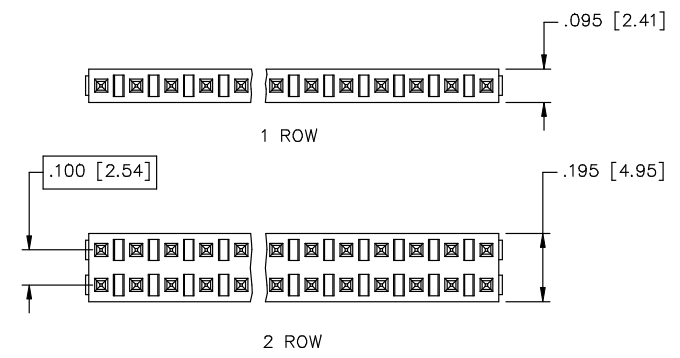

TYPICAL REVERSE (FEED THRU) APPLICATION

Unless otherwise specified: All dimensions are: Inches [mm]	Drawn by: J CACHINA	Date: 09/05/07	 AN INTERPLEX INDUSTRIES CO.	100 PIONEER AVE. WARREN, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
	-Tolerances-	Checked by: JSC		Date: 09/05/07
No of places	IN [mm]	Title: (ROHS COMPLIANT) SB HDR-.100 PITCH - REVERSE MATE, TRIMMED		Part No: HC___A___-___RZ0
one	±.1 ±2.54	Ref No: S20720		Scale: 3:1
two	±.02 ±0.5			Sheet 1 of 1
three	±.010 ±0.25			
Angular ±2°				