


Drawing Nr.	„L“ IN [MM]
32BA	0.364 [9.25]
32BB	0.479 [12.17]

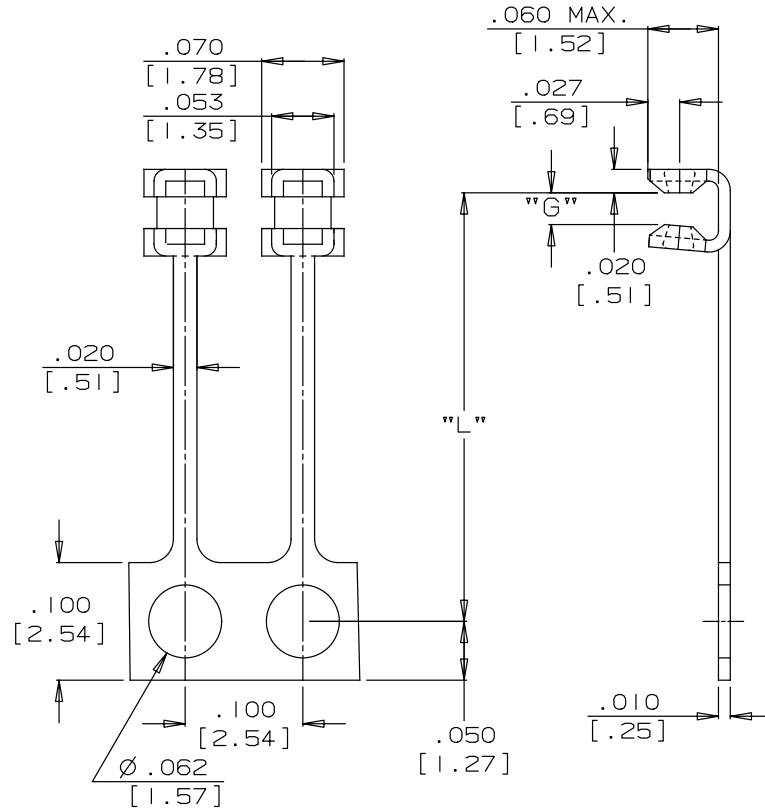

www.interplexnas.de | www.interplex.com/NAS

SELECT SPECIFIC OPTIONS TO DETERMINE ORDERING CODE:

TYPE	PITCH (P)	DRWG. NO.	SOLDER LOCATION	GAP (G)	SOLDER TYPE	SOLDER STOP	STAND OFF (SO)	MATERIAL/ PLATING	STANDARD ORIENTATION
A = DIP	A = .100[2.54]	32BA 32BB	D = Double T = Top S = Bottom O = No Solder	18 = .018[0.46] 22 = .022[0.56] 27 = .027[0.69] 32 = .032[0.81] 36 = .036[0.914] 47 = .047[1.19]	See Chart on Page 9	O = No Stop S = Stop	O = None	E = Phosphor Bronze Pre-Plated 100% Sn K = Phosphor Bronze Post-Plated 100% Sn C = Phosphor Bronze Pre-Plated Sn60/Pb40 H = Phosphor Bronze Post-Plated Sn60/Pb40	D = Winding (DD)

CODE:

--	--	--	--

